

### The AMMCO 9 Point Advantage



9,000 lb. Capacity Symmetric BASEPLATE Model 4T29BPSR1



12,000 lb. Capacity SYMMETRIC Model 4T212SAR1




16,000 lb. Capacity SYMMETRIC model 4T216SAR1



#### 20,000 lb. capacity SYMMETRIC model 4T220SAR1



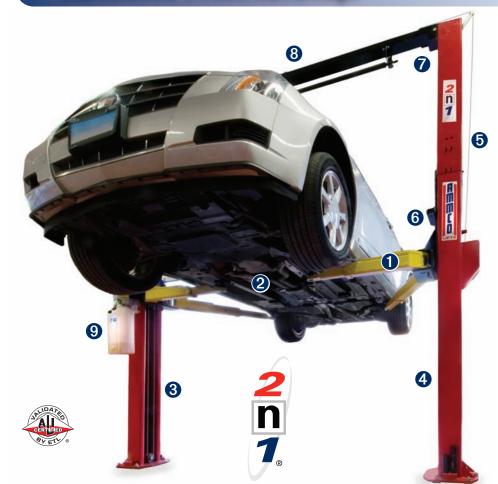

### 10,000 lb. capacity

- Exclusive 2n1 lifting arms for asymmetric or symmetric vehicle positioning. Improves versatility and ease of use.
- 2 1½" stack pad lift system for faster set up. "V" and "P" models also have 3" & 6" height adapters for SUV's and trucks).
- **3** Proven twin hydraulic cylinders and cable equalization.
- 4 More steel for more strength. Reinforced columns for better stability.
- 5 Two installation heights of 138 <sup>1</sup>/<sub>2</sub>" or 148 <sup>1</sup>/<sub>2</sub>" (extended height "P" model is 172").
- 6 Door bumper guards and outer arm adapter on "P" series protects the vehicle.
- Steel pulleys for low maintenance and longer life.
- **8** "P" models are 10 inches wider (145 <sup>1</sup>/<sub>2</sub>").
- North American made power pack for dependability.
  Can be mounted on driver or passenger side for specific applications.

# AMMCO LIFTS

# **Two Post Lift Models**

TWO POST FEATURES	4TD21NSR1	4TV21NSR1	4TP21NSR1	4T212SAR1	4T216SAR1
ALI/ETL Certified	YES	YES	YES	YES	YES
2N1 (asymmetric/symmetric) Lifting	YES	YES	YES	NO - Symmetric	No - Symmetric
Clear Floor Design	YES	YES	YES	YES	YES
Cable Equalization	YES	YES	YES	NO - Hydraulic	YES
Standard Height Model	YES	YES	YES	YES	YES
Extended Height Model	NO	NO	YES - 172" Height	YES - Field Adjustable	YES - Field Adjustable
Standard Width Model	YES	YES	NO	YES	YES
Extended Width Model	NO	NO	YES	YES - Field Adjustable	NO
Stack Pad Adapters (truck adapters)	11/2″	11/2" & 3" & 6"	11⁄2″ & 3″ & 6″	6″	screw pad with 10" adapter
Door Bumper Guards	NO	NO	YES	NO	NO
Structural Warranty	6 months	12 months	5 years	5 years	5 years
Hydraulic Parts Warranty	6 months	12 months	2 years	2 years	2 years
Other Parts Warranty	6 months	12 months	2 years	2 years	2 years
Accessories Warranty	90 days	90 days	90 days	90 days	90 days
Labour Warranty	90 days	6 months	l year	l year	1 year
Optional Blue Paint	YES	YES	YES	YES	YES
Optional 3 Phase Power	YES	YES	YES	YES	YES
SPECIFICATIONS					
Capacity	10,000 lbs.	10,000 lbs.	10,000 lbs.	12,000 lbs.	16,000 lbs.
Overall Height	138½" to 148½"	138½" to 148½"	138½" to 148½"	152" to 179"	173" to 193"
Under Bar Clearance	131" to 141"	131" to 141"	131" to 141"	149" to 176"	164" to 184"
Overall Width	135½″	135½″	145½"	132" to 136"	148″
Width Between Columns	113″	113″	123″	105" to 109"	120″
Drive Thru Width	92″	92″	102″	94" to 98"	109″
Height to Lowered Lift Pad	41⁄2″	41/2"	41/2"	41/2"	61/2″
Raised Heigth with Standard Pad	75″	75″	75″	76″	75″
Raised Height with Adapters	N/A	84″	84″	82″	85″
Lifting Time	55 seconds	55 seconds	55 seconds	70 seconds	70 seconds
Front Arm Reach	281/2" to 42"	281⁄2" to 42"	281⁄2" to 42"	26" to 571/2"	38" to 62"
Rear Arm Reach	37" to 55"	37" to 55"	37" to 55"	26" to 571/2"	38" to 62"
Standard Power Requirements	230V-60Hz-1ph-20A	230V-60Hz-1ph-20A	230V-60Hz-1ph-20A	230V-60Hz-1ph-20A	230V-60Hz-1ph-20A
Shipping Weight	1,980 lbs. (898 kg)	1,980 lbs. (898 kg)	2,030 lbs. (907 kg)	2,200 lbs. (998 kg)	3,350 lbs. (1,520 kg)

Ammco lifts require professional installation at an additional cost. Ask your Ammco Distributor for more information.




Manufacturer of Ammco<sup>®</sup>, Coats<sup>®</sup> and BADA<sup>®</sup>Automobile Service Equipment, Tools and Accessories. 2430 Lucknow Drive, Unit #9 Mississauga, Ontario L5S 1V3 905-672-9440 Printed in Canada. Fax: 905-672-9455

www.ammcolifts.ca



All Pictures for illustration purposes only. Specifications subject to change without notice. Part #TP2N101 (May 2009)



**Available Accessories** 

**Outer Arm Adapter** 



11/2" - 3" - 6" Height Adapters

**Door Bumper Guard** 

